




**LUNO
SYSTEMS**

ATS 2™

BREATHING AIR TROLLEY SYSTEM



FEATURES

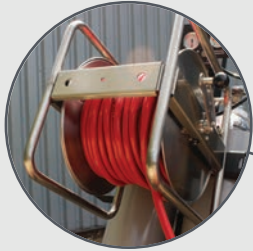


50m hose reel



Tow hitch coupler



Cylinder clamp

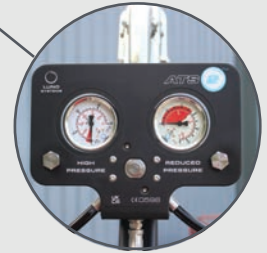

Control panel
(with or without whistle)




Cylinder switching
for continuous
operation



Easy to move



Heavy-duty wheels for
all terrain use and brake

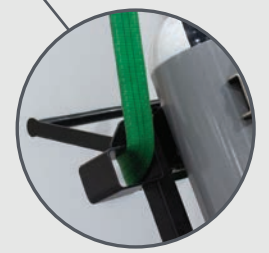

Fork pockets/
sling pockets

Large portable trolley system for extended duration with integrated handling aids


High pressure air is fed to a regulator which reduces the pressure to under 10 bar, where it is fed to 2 hose reels which will each hold 50 metres of hose for each user.

The user's breathing apparatus is connected to the end of the airline. The control panel can be supplied optionally with a whistle for audible warning of depleted cylinders, which will activate at 35 bar.

The robust, no compromise construction from a combination of stainless and mild steel will ensure long lasting use in rigorous industrial environments and the caster leg allows for the cylinders to be easily moved manually.

Tested and certified to EN14593-1:2005, provided it is used with compatible breathing apparatus.

TYPICAL CONFIGURATION OPTIONS

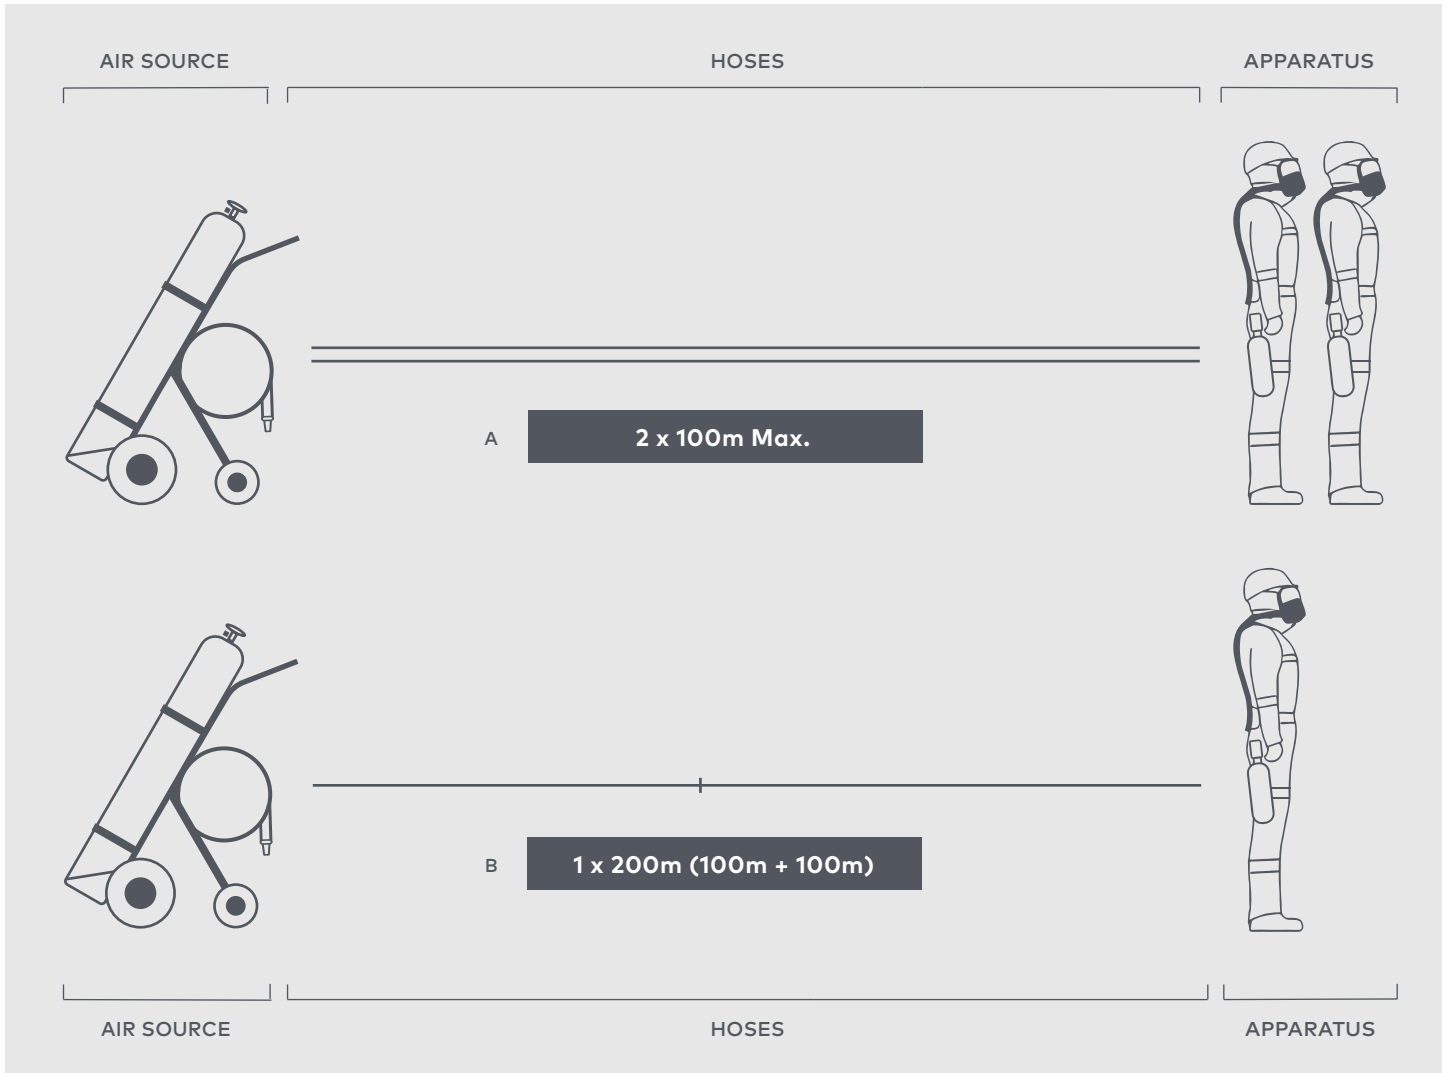

AIR SOURCE	
20195	ATS2 TROLLEY

BREATHING AIR HOSES
See HOSES AND UMBILICALS product sheet

CYLINDERS	
2 X 11531	50L 300BAR COMPOSITE CYLINDER
2 X 10368	50L 300BAR STEEL CYLINDER WITH VALVE / WITHOUT VALVE GUARD

APPARATUS
See AIRSTAR product sheet

ACCESSORIES	
11275	MEDIUM PRESSURE Y-PIECE
11283	HEAVY DUTY MASK BAG



SPECIFICATION

	ATS2 TROLLEY SYSTEM
Approvals	EN 14593
Max. No. of Users	2
Cylinder Capacity	2 x 50L
Working Duration	2 x 50L cylinders - 11 hours
	Unlimited through cylinder rotation
Size (mm)	1959 (H) x 1263 (W) x 1274 (D)
Weight (incl. Hose/excl. Cylinders)	65kg
Hose Length	50m
Alarm Whistle	35bar
Control Panel	Fixed
Hose Reels	Up to 2
Materials	Main trolley - powder coated steel. Hose reels band control panel - stainless steel
Lifting Eye and Fork Pocket	Yes